




# SM320B THER SM3200B

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage - 20 to 200 Volts    Forward Current - 3.0 Ampere

### DO-214AA(SMB)

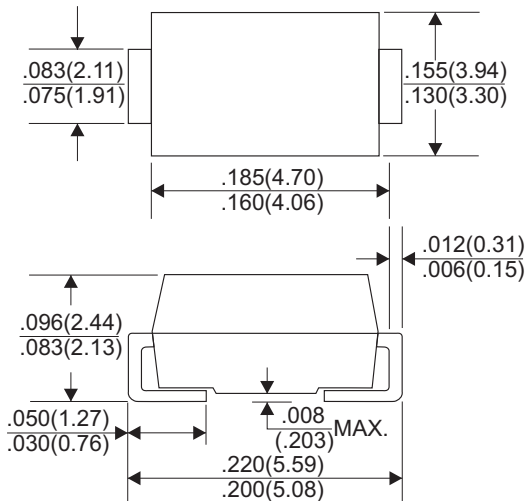

Dimensions in inches and (millimeters)

## FEATURES

- \* The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- \* For surface mounted applications
- \* Metal silicon junction, majority carrier conduction
- \* Low power loss, high efficiency
- \* Built-in strain relief, ideal for automated placement
- \* High forward surge current capability
- \* High temperature soldering guaranteed: 250°C/10 seconds at terminals

## MECHANICAL DATA

- \* Case: Molded plastic
- \* Terminals: leads solderable per MIL-STD-750, Method 2026
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

TYPE NUMBER	SM 320B	SM 330B	SM 340B	SM 350B	SM 360B	SM 380B	SM 3100B	SM 3150B	SM 3200B	UNITS	
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	100	150	200	V	
Maximum RMS Voltage	14	21	28	35	42	56	70	105	140	V	
Maximum DC Blocking Voltage	20	30	40	50	60	80	100	150	200	V	
Maximum Average Forward Rectified Current	3.0									A	
See Fig. 1											
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	80									A	
Maximum Instantaneous Forward Voltage at 3.0A	0.55		0.70		0.85		0.95			V	
Maximum DC Reverse Current Ta=25°C	0.05									mA	
at Rated DC Blocking Voltage Ta=100°C	10									mA	
Typical Junction Capacitance (Note 1)	500				300					pF	
Typical Thermal Resistance RθJA (Note 2)	55									62	°C/W
Operating Temperature Range Tj	-65 — +125				-65 — +150						°C
Storage Temperature Range Tstg	-65 — +150									°C	

### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

# RATING AND CHARACTERISTIC CURVES (SM320B THRU SM3200B)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

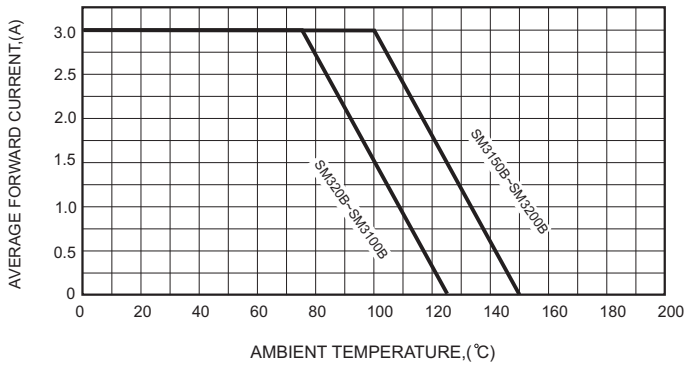


FIG.2-TYPICAL FORWARD CHARACTERISTICS

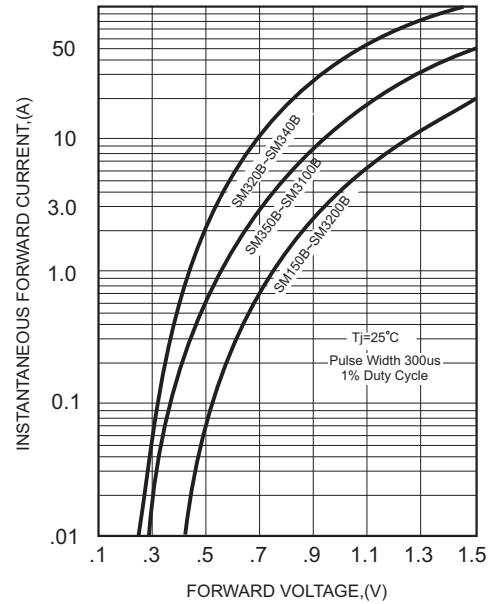


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

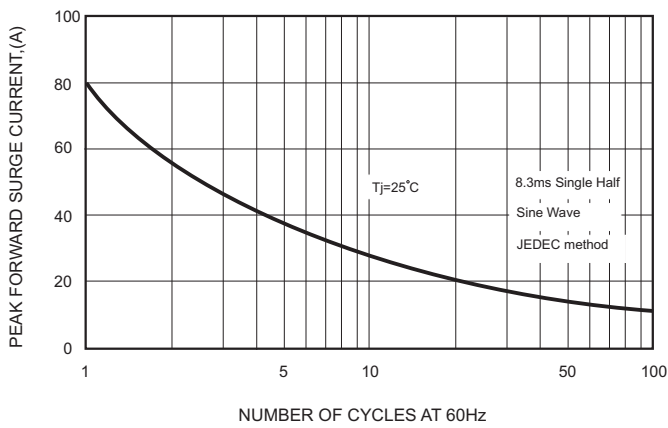


FIG.4-TYPICAL JUNCTION CAPACITANCE

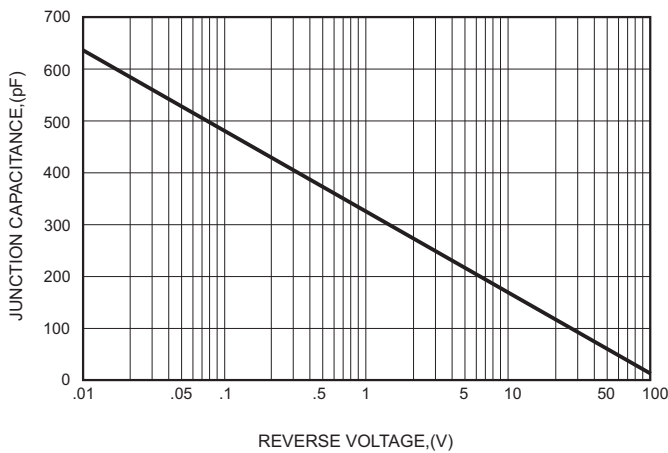


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

