



# HER301G THRU HER308G

## GLASS PASSIVATED HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 3.0 Ampere


### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* High speed switching

### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 1.10 grams

#### DO-27

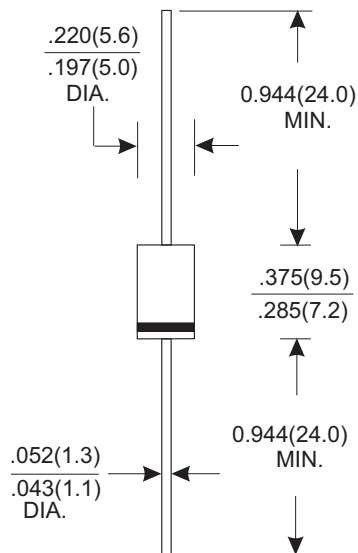

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER   | HER301G    | HER302G | HER303G | HER304G | HER305G | HER306G | HER307G | HER308G | UNITS |
|---|------------|---------|---------|---------|---------|---------|---------|---------|-------|
| Maximum Recurrent Peak Reverse Voltage  | 50         | 100     | 200     | 300     | 400     | 600     | 800     | 1000    | V     |
| Maximum RMS Voltage   | 35         | 70      | 140     | 210     | 280     | 420     | 560     | 700     | V     |
| Maximum DC Blocking Voltage   | 50         | 100     | 200     | 300     | 400     | 600     | 800     | 1000    | V     |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at Ta=50°C                      | 3.0        |         |         |         |         |         |         |         | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method) | 150        |         |         |         |         |         |         |         | A     |
| Maximum Instantaneous Forward Voltage at 3.0A   | 1.0        |         | 1.3     |         | 1.70    |         |         |         | V     |
| Maximum DC Reverse Current Ta=25°C  | 10         |         |         |         |         |         |         |         | µA    |
| at Rated DC Blocking Voltage Ta=100°C   | 200        |         |         |         |         |         |         |         | µA    |
| Maximum Reverse Recovery Time (Note 1)  | 50         |         |         |         | 70      |         |         |         | nS    |
| Typical Junction Capacitance (Note 2)   | 75         |         |         |         |         |         |         |         | pF    |
| Operating and Storage Temperature Range T <sub>J</sub> , T <sub>STG</sub>                             | -65 — +150 |         |         |         |         |         |         |         | °C    |

#### NOTES:

1. Reverse Recovery Time test condition: IF=0.5A, IR=1.0A, IRR=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

# RATING AND CHARACTERISTIC CURVES (HER301G THRU HER308G)

FIG. 1-TYPICAL FORWARD CHARACTERISTICS

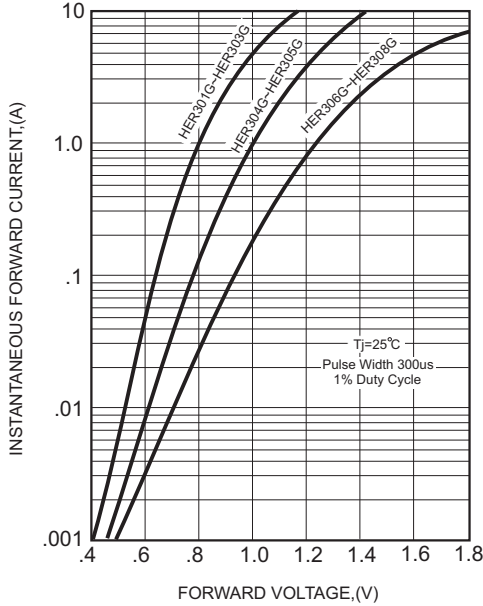


FIG. 2-TYPICAL FORWARD CURRENT DERATING CURVE


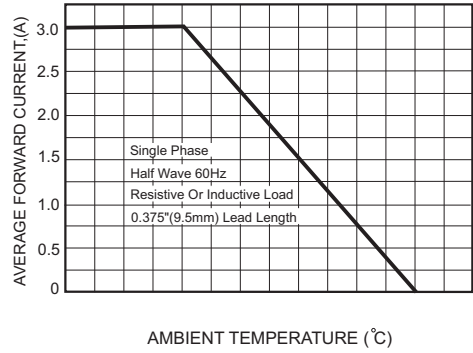


FIG. 3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

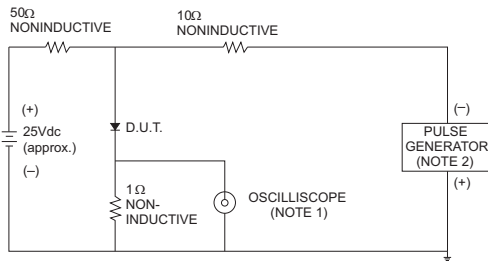

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.  
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

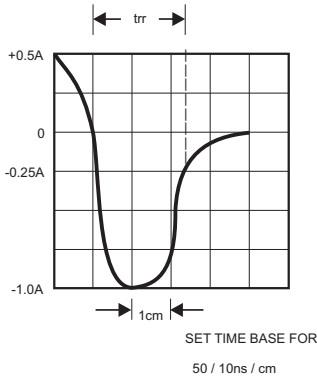


FIG. 4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

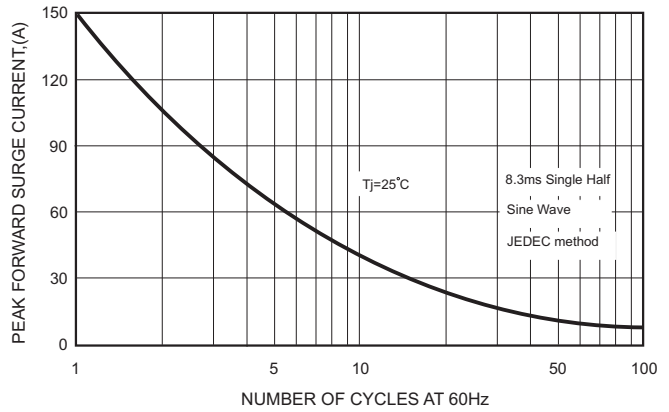


FIG. 5-TYPICAL JUNCTION CAPACITANCE

