




SM5817A THER SM5819A

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage - 20 to 40 Volts Forward Current - 1.0 Ampere

DO-214AC(SMA)

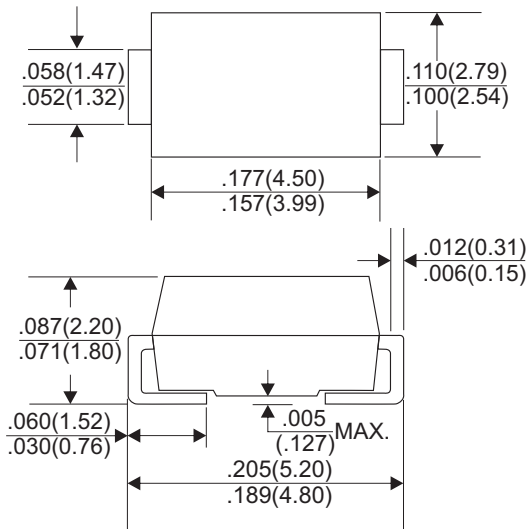

Dimensions in inches and (millimeters)

FEATURES

- * The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- * For surface mounted applications
- * Metal silicon junction, majority carrier conduction
- * Low power loss, high efficiency
- * Built-in strain relief, ideal for automated placement
- * High forward surge current capability
- * High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

- * Case: Molded plastic
- * Terminals: leads solderable per MIL-STD-750, Method 2026
- * Polarity: Color band denotes cathode end
- * Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SM5817A	SM5818A	SM5819A	UNITS
Maximum Recurrent Peak Reverse Voltage	20	30	40	V
Maximum RMS Voltage	14	21	28	V
Maximum DC Blocking Voltage	20	30	40	V
Maximum Average Forward Rectified Current at Ta=90°C	1.0			A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	25			A
Maximum Instantaneous Forward Voltage at 1.0A	0.45	0.55	0.60	V
Maximum DC Reverse Current Ta=25°C	1.0			mA
at Rated DC Blocking Voltage Ta=100°C	10			mA
Typical Junction Capacitance (Note 1)	110			pF
Typical Thermal Resistance RθJA (Note 2)	80			°C/W
Operating Temperature Range Tj	-65 — +125			°C
Storage Temperature Range Tstg	-65 — +150			°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient.

RATING AND CHARACTERISTIC CURVES (SM5817A THRU SM5819A)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

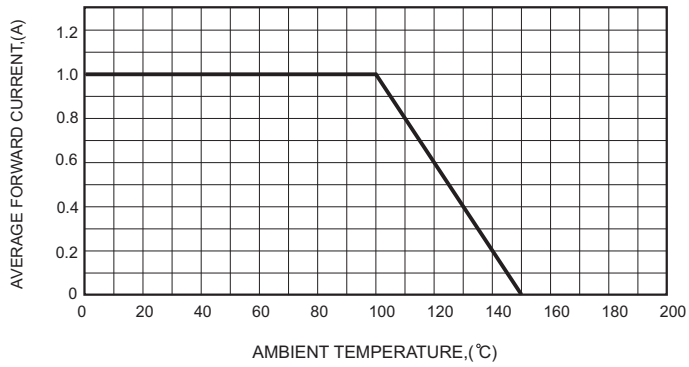


FIG.2-TYPICAL FORWARD CHARACTERISTICS

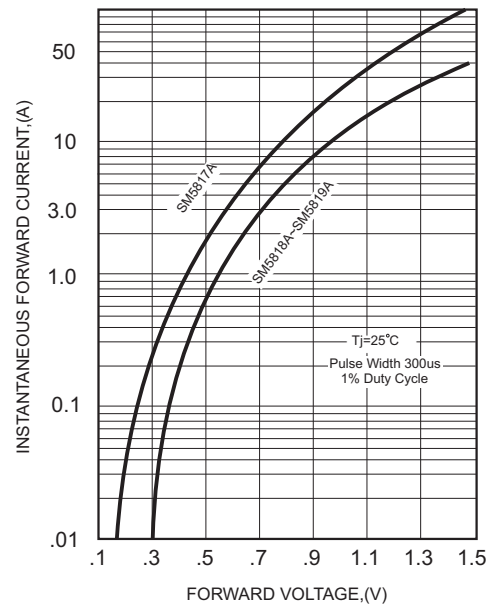


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

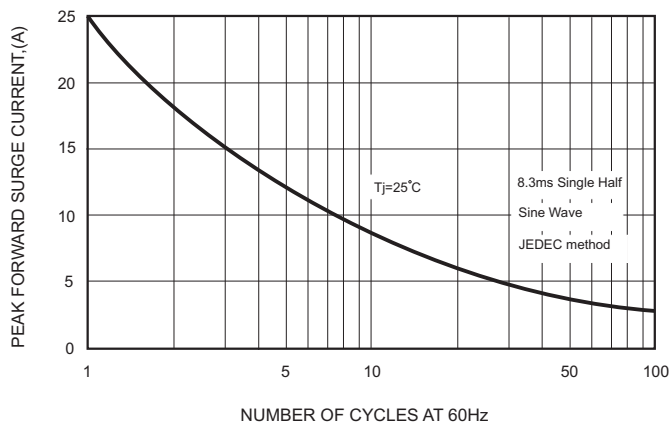


FIG.4-TYPICAL JUNCTION CAPACITANCE

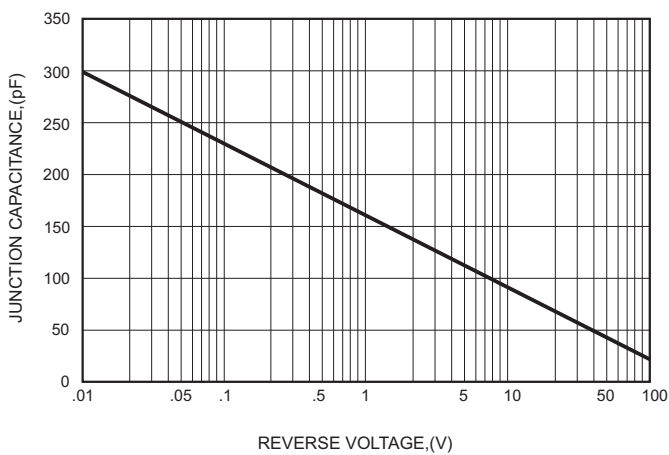


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

